



Asbestos Assessment

Holy Name of Jesus 181 Belmont Ave, Hamilton, ON, L8L 7M5

Prepared for:

Hamilton-Wentworth Catholic District School Board

90 Mulberry Street Hamilton, Ontario, L8N 3R9

August 31, 2023

Pinchin File: 320582.004



Issued to: Issued on: Pinchin File: Issuing Office: Primary Contact: Hamilton-Wentworth Catholic District School Board August 31, 2023 320582.004 Hamilton, ON Emily Balfour, Project Manager, <u>ebalfour@pinchin.com</u>

Author:

Emily Balfour Project Manager 365.889.5147 ebalfour@pinchin.com

Lott My

Reviewer:

Leslie Heywood, BEng Mgt Senior Project Manager 289.237.4294 Iheywood@pinchin.com



EXECUTIVE SUMMARY

Hamilton-Wentworth Catholic District School Board (Client) retained Pinchin Ltd. (Pinchin) to conduct an asbestos building materials assessment of Holy Name of Jesus located at 181 Belmont Ave, Hamilton, ON, L8L 7M5.

The objectives of the assessment were to document the locations of asbestos building materials, evaluate their condition and develop corrective action plans as required for the purposes of long-term management. The results of this assessment are not intended for construction, renovation, demolition or project tendering purposes.

SUMMARY OF RECOMMENDATIONS

The following is a summary of significant recommendations; refer to the body of the report for detailed recommendations:

- 1. Perform a pre-construction assessment prior to alteration, demolition or maintenance work.
- 2. Sample any presumed asbestos-containing materials (ACM) prior to alteration or maintenance work if presumed ACM may be disturbed by the work.

This Executive Summary is subject to the same standard limitations as contained in the report and must be read in conjunction with the entire report.



TABLE OF CONTENTS

1.0	INTRO	DUCTION AND SCOPE	
	1.1	Scope of Assessment	. 1
2.0	METH	ODOLOGY	. 1
3.0	BACK	GROUND INFORMATION	. 1
	3.1 3.2 3.3	Building Year of Construction and Additions Existing Reports Inaccessible Locations	. 1
4.0	FINDI	NGS	. 2
	4.1 4.2	Excluded Asbestos Materials Summary of Building Materials	. 2 . 2
5.0	RECO	MMENDATIONS	. 4
	5.1 5.2	General On-going Management and Maintenance	. 4 . 4
6.0	TERM	S AND LIMITATIONS	. 4
7.0	REFE	RENCES	. 5

APPENDICES

APPENDIX I	Drawings
APPENDIX II	Asbestos Analytical Certificates
APPENDIX III	Methodology
APPENDIX IV	Location List
APPENDIX V	Summary Report / Sample Log
APPENDIX VI	HMIS All Data Report



1.0 INTRODUCTION AND SCOPE

Hamilton-Wentworth Catholic District School Board (Client) retained Pinchin Ltd. (Pinchin) to conduct an asbestos building materials assessment of Holy Name of Jesus located at 181 Belmont Ave, Hamilton, ON, L8L 7M5.

Pinchin performed the assessment on July 17, 2023.

The objectives of the assessment were to document the locations of asbestos building materials, evaluate their condition and develop corrective action plans as required. This assessment is only to be used for the purposes of long-term management and routine maintenance. The results of this assessment are not to be used for construction, renovation, demolition, or project tendering purposes.

1.1 Scope of Assessment

The assessment was performed to establish the location and type of asbestos building materials incorporated in the structure(s) and its finishes. The **assessed area** consisted of all parts of the building, excluding the roof.

2.0 METHODOLOGY

Pinchin conducted a room-by-room assessment (rooms, corridors, service areas, exterior, etc.) to identify asbestos-containing building materials as defined in the scope.

The assessment was limited to non-intrusive testing. Concealed spaces such as those above solid ceilings and within shafts and pipe chases were accessed via existing access panels only. Demolition of walls, solid ceilings, structural items, interior finishes or exterior building finishes, to determine the presence of concealed materials was not conducted.

For further details on the methodology including test methods, refer to Appendix III.

3.0 BACKGROUND INFORMATION

3.1 Building Year of Construction and Additions

ltem	Details
Year of Construction	2012

3.2 Existing Reports

Pinchin previously prepared the following report, which has been reviewed as part of this assessment:

 Asbestos Assessment Report, Holy Name of Jesus, February 2023, Pinchin File No. 320582.001.



3.3 Inaccessible Locations

Inaccessible locations (rooms or areas), if any, are indicated in the Location List Report in Appendix IV. These locations within the assessed area were not accessible to the surveyor and are therefore not included in the report.

4.0 FINDINGS

The following section summarizes the findings of the assessment. For details on locations of building materials assessed, refer to the Asbestos Material Summary Report and All Data Report in Appendices V and VI.

4.1 Excluded Asbestos Materials

A number of materials which might contain asbestos were not sampled during this assessment due to limitations in scope and methodology. Where present, these materials are assumed to contain asbestos until otherwise proven by sampling and analysis. These materials are not shown on the drawings in Appendix I. Excluded materials presumed to contain asbestos include:

- Roofing tars and mastics
- Ceramic tile setting compound
- Elevator and lift brakes
- Electrical components
- Mechanical packing, ropes and gaskets
- Vermiculite
- Adhesives and duct mastics
- Caulking and putties
- Sealants on pipe threads

4.2 Summary of Building Materials

This section includes a summary of building materials that have been confirmed non-asbestos by sampling or based on the manufacture date and known end of use of asbestos in these products.

Appendix II presents the asbestos bulk sample analytical results (if applicable).



Material and Application	Asbestos Type	Photo
Pipes are either uninsulated or insulated with non-asbestos fibreglass or elastomeric insulation (Armaflex).	None	
Ducts are either uninsulated or insulated with non-asbestos fibreglass (foil-faced or canvas).	None	
Mechanical equipment is either uninsulated or insulated with non- asbestos fibreglass.	None	
All ceiling tiles are presumed to be non-asbestos based on the date of manufacture determined from the date stamp applied to the top of the tiles and the age of the materials determined from the age of the building.	None	
Asbestos in drywall joint compound was banned in Canada in 1980. The building was constructed after 1986 (1980 plus a reasonable non- compliance period based on our experience) and the drywall joint compound is assumed to contain no asbestos.	None	
Vinyl sheet flooring is presumed to be non-asbestos based on historical knowledge of the type of flooring (rubber) or based on the lack of a paper backing layer (underpad).	None	



Material and Application	Asbestos Type	Photo
Vinyl floor tiles and mastic were presumed to be non-asbestos based on historical knowledge of the date of installation.	None	

5.0 RECOMMENDATIONS

5.1 General

Perform a detailed intrusive assessment prior to maintenance work, building renovation or demolition operations. The assessment should include destructive testing (e.g., coring and/or removal of building finishes and components), and other hazardous materials (lead, mercury, PCBs, mould, etc.) and materials not tested in this study (e.g., roofing materials, caulking, mastics).

5.2 On-going Management and Maintenance

The following recommendations are made regarding on-going management and maintenance work involving the asbestos materials identified.

5.2.1 Asbestos

Sample presumed ACM prior to alteration, demolition, or maintenance work if the presumed ACM may be disturbed by the work.

6.0 TERMS AND LIMITATIONS

This work was performed subject to the Terms and Limitations presented or referenced in the proposal for this project.

Information provided by Pinchin is intended for Client use only. Pinchin will not provide results or information to any party unless disclosure by Pinchin is required by law. Any use by a third party of reports or documents authored by Pinchin or any reliance by a third party on or decisions made by a third party based on the findings described in said documents, is the sole responsibility of such third parties.



Pinchin accepts no responsibility for damages suffered by any third party as a result of decisions made or actions conducted. No other warranties are implied or expressed.

7.0 REFERENCES

The following legislation and documents were referenced in completing the assessment and this report:

- Asbestos on Construction Projects and in Buildings and Repair Operations, Ontario Regulation 278/05.
- 2. Designated Substances, Ontario Regulation 490/09.
- 3. Ministry of the Environment Regulation, R.R.O. 1990 Reg. 347 as amended.


Template: Master Report for Asbestos Assessment, HAZ, July 29, 2021

^{\\}PIN-HAM-FS02\job\320000s\0320582.000 HWCDSB,Various2023Projects,ASB,CONS\0320582.004 HWCDSB,AllSites,2023,ASB,ASSMT\Deliverables\Holy Name Of Jesus (N)\Deliverables\320582.004 Asbestos Asmnt Report Holy Name Of Jesus HWCDSB Aug 31 2023.docx


APPENDIX I Drawings NOT ALL KNOWN OR SUSPECTED ASBESTOS BUILDING MATERIALS MAY BE DEPICTED ON THE DRAWING. REFER TO THE ASBESTOS ASSESSMENT REPORT FOR A COMPLETE LIST OF KNOWN AND SUSPECTED ASBESTOS BUILDING MATERIALS.

LEGEND IS COLOUR DEPENDENT. NON-COLOUR COPIES MAY ALTER INTERPRETATION.

BASE PLAN PROVIDED BY CLIENT.

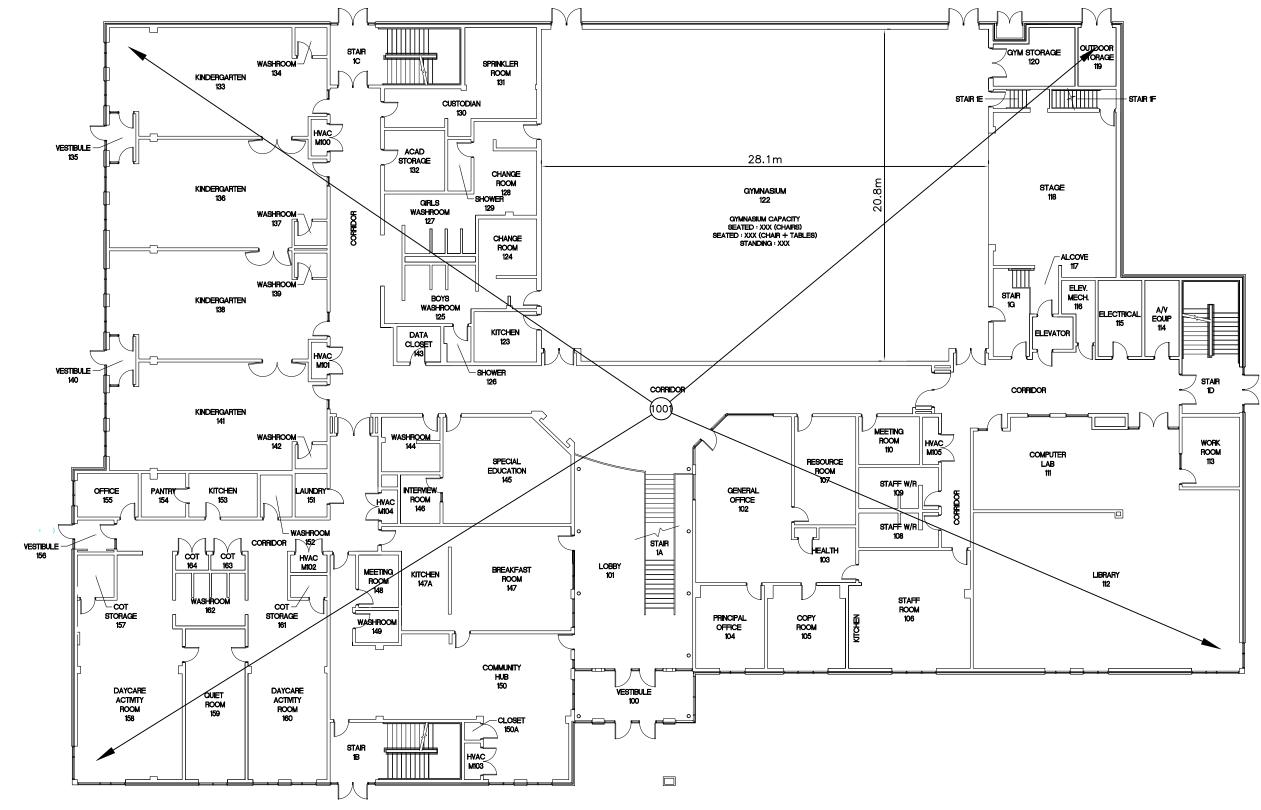




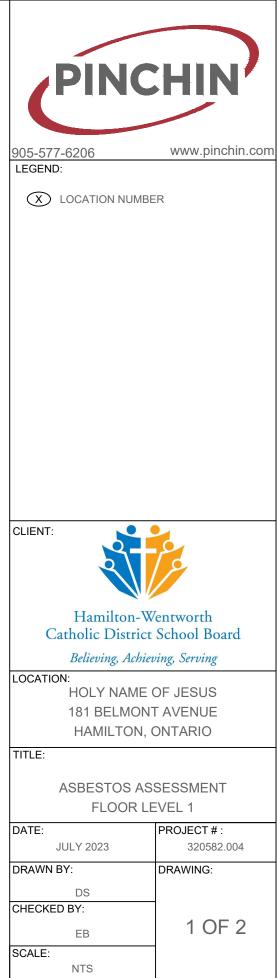

NOT ALL KNOWN OR SUSPECTED ASBESTOS BUILDING MATERIALS MAY BE DEPICTED ON THE DRAWING. REFER TO THE ASBESTOS ASSESSMENT REPORT FOR A COMPLETE LIST OF KNOWN AND SUSPECTED ASBESTOS BUILDING MATERIALS.

LEGEND IS COLOUR DEPENDENT. NON-COLOUR COPIES MAY ALTER INTERPRETATION.

BASE PLAN PROVIDED BY CLIENT.

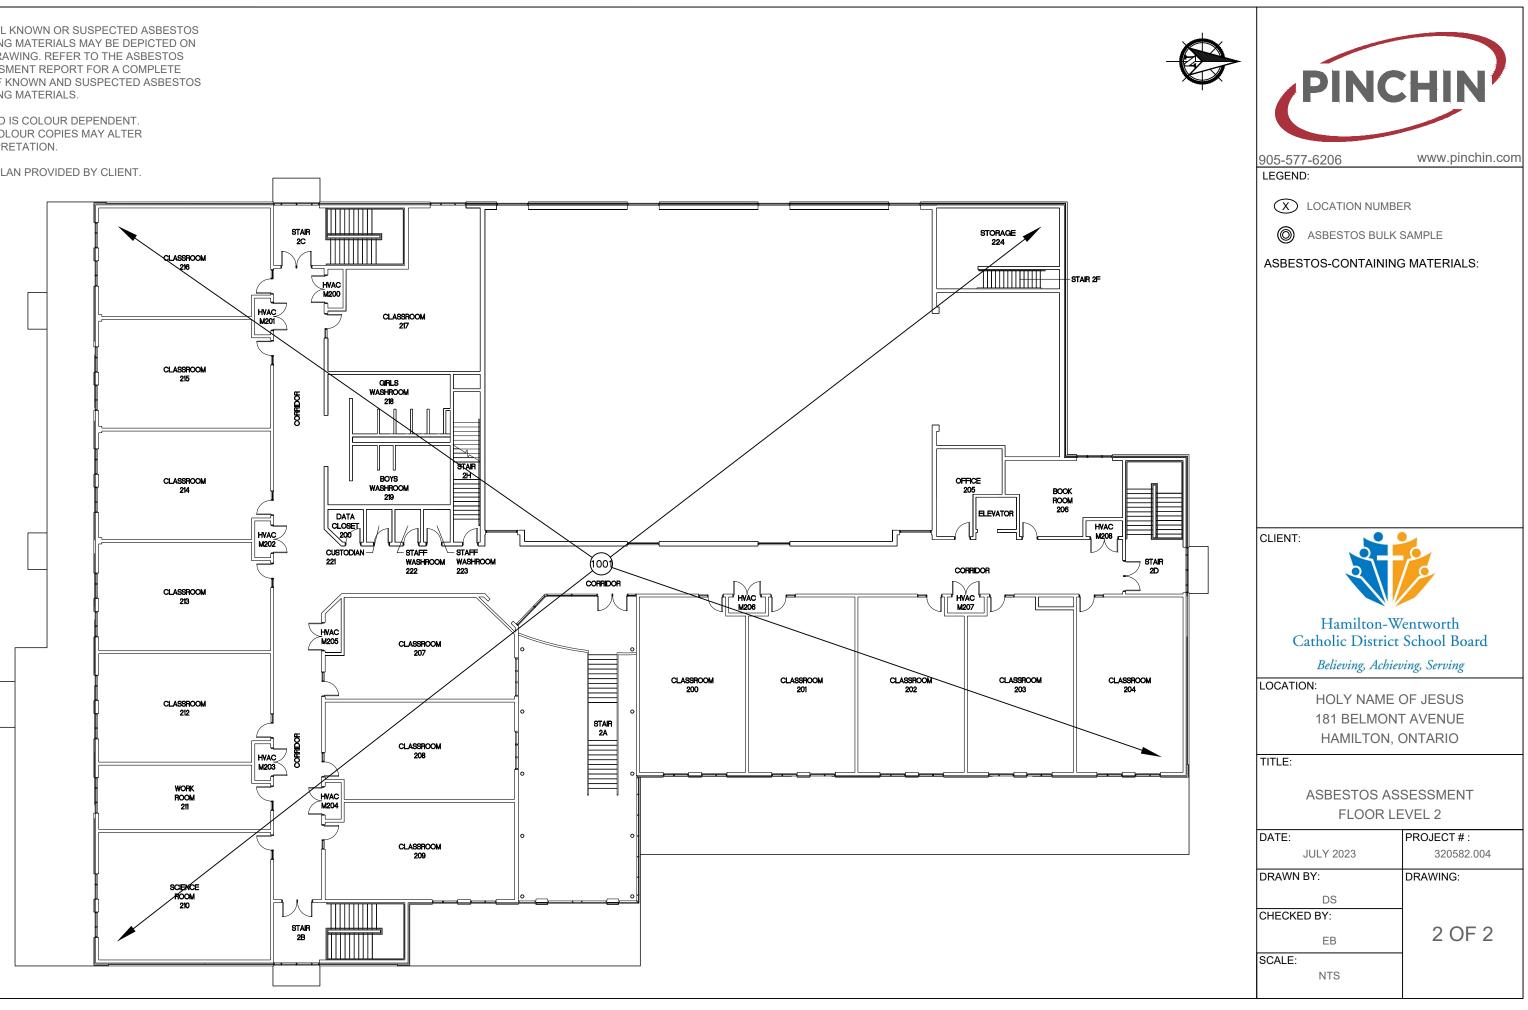

APPENDIX II Asbestos Analytical Certificates Asbestos bulk sampling was not performed based on the date of construction (2012)

APPENDIX III Methodology



1.0 GENERAL

An inspection was conducted to identify the asbestos-containing materials (ACM) incorporated in the structure and its finishes as defined by the scope of work.

Information regarding the location and condition of ACM encountered and visually estimated quantities were recorded. The locations of any samples collected were recorded on small-scale plans. As-built drawings and previous reports were referenced where provided.

Sample collection (where performed) was conducted in accordance with our Standard Operating Procedures.

The inspection for asbestos included friable and non-friable asbestos-containing materials (ACM). A friable material is a material that when dry can be crumbled, pulverized or powdered by hand pressure.

Where samples were collected, a separate set of samples was collected of each type of homogenous material suspected to contain asbestos. A homogenous material is defined by the US EPA as material that is uniform in texture and appearance, was installed at one time, and is unlikely to consist of more than one type or formulation of material. The homogeneous materials were determined by visual examination and available information on the phases of construction and prior renovations.

Where samples were collected, samples were collected at a rate that is in compliance with the requirements of local regulations and guidelines. The sampling strategy was also based on known ban dates and phase out dates of the use of asbestos; sampling of certain building materials is not conducted after specific construction dates. In addition, to be conservative, several years past these dates are added to account for some uncertainty in the exact start / finish date of construction and associated usage of ACM. In some cases, manufactured products such as asbestos cement pipe were visually identified without sample confirmation.

Where samples were collected, the asbestos analysis was completed using a stop-positive approach. Only one result meeting the regulated criteria was required to determine that a material is asbestoscontaining, but all samples must be analyzed to conclusively determine that a material is non-asbestos. The laboratory stopped analyzing samples from a homogeneous material once a result equal to or greater than the regulated criteria is detected in any of the samples of that material. All samples of a homogeneous material were analyzed if no asbestos is detected. In some cases, all samples were analyzed in the sample set regardless of result.

Where samples were collected, the analysis was performed in accordance with Test Method EPA/600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials, July 1993.

Where samples were collected, analytical results were compared to the following criteria.



Asbestos Assessment Methodology Appendix

Jurisdiction*	Friable	Non-Friable
Ontario	0.5%	0.5%

Where building materials are described in the report as "non-asbestos" or "does not contain asbestos", this means that either no asbestos was detected by the analytical method utilized in any of the multiple samples or, if detected, it is below the lower limit of an asbestos-containing material in the applicable regulation. Additionally, these terms are used for materials which historically are known to not include asbestos in their manufacturing.

APPENDIX IV Location List





Client:Hamilton-Wentworth Catholic District Sch Building Name: Holy Name of Jesus Survey Date:

Building Phases: A: 2012

Site: 181 Belmont Avenue, Hamilton, ON

Last Re-Assessment: 2023-07-17

Location No.	Name or Description	Area ft ²	Floor No.	Bldg. Phase	Notes
0	Presumed Asbestos-Containing Materials	0	0	A	Where present, these materials are assumed to contain asbestos until otherwise proven by sampling and analysis.
1001	Entire Building	0		А	

APPENDIX V Summary Report / Sample Log



HAZARDOUS MATERIALS SUMMARY / SAMPLE LOG



Client:Hamilton-Wentworth Catholic Site: 181 Belmont Avenue, Hamilton, ON			nilton, ON Building Name: Holy Name o	Building Name: Holy Name of Jesus						Survey Date:						
НАΖМАТ	Sample No	System/Component/Material/Sample Description	Locations	Bldg. Phase	LF	SF	EA	%	Туре	Positive	Friability					
Asbestos	V9500	Other N/a Roofing Tars And Mastics, Ceramic Tile Setting Compound, Elevator And Lift Brakes, Electrical Components, Mechanical Packing, Ropes, And Gaskets, Vermiculite, Adhesives And Duct Mastics, Caulking And Putties, Sealants On Pipe Threads	0	A	0	0	0	100	Presumed Asbestos	Yes	NF					
Asbestos	V0000	Ceiling Ceiling Tiles (lay-in)	1001	А	0	0	0	0	Non Asbestos	No						
Asbestos	V0000	Ceiling Drywall And Joint Compound	1001	А	0	0	0	0	Non Asbestos	No						
Asbestos	V0000	Duct Not Insulated	1001	А	0	0	0	0	Non Asbestos	No						
Asbestos	V0000	Floor Ceramic Tiles	1001	А	0	0	0	0	Non Asbestos	No						
Asbestos	V0000	Floor Vinyl Floor Tile And Mastic	1001	А	0	0	0	0	Non Asbestos	No						
Asbestos	V0000	Floor Vinyl Sheet Flooring	1001	А	0	0	0	0	Non Asbestos	No						
Asbestos	V0000	Other None Found	1001	А	0	0	0	0	Non Asbestos	No						
Asbestos	V0000	Piping All Not Insulated	1001	А	0	0	0	0	Non Asbestos	No						
Asbestos	V0000	Wall Drywall And Joint Compound	1001	A	0	0	0	0	Non Asbestos	No						
Asbestos	V0000	Wall Masonry	1001	А	0	0	0	0	Non Asbestos	No						



HAZARDOUS MATERIALS SUMMARY / SAMPLE LOG



Legend:

- Sample number S#### Asbestos sample collected
- L#### Paint sample collected
- P#### PCB sample collected
- M#### Mould sample collected
- V#### Material visually similar to numbered sample collected
- V0000 Known non Hazardous Material
- V9000 Material is visually identified as Hazardous Material
- V9500 Material is presumed to be Hazardous Material
- [Loc. Abated Material No.]

- Units SF Square feet
- LF Linear feet
- EA Each
- % Percentage

- NF Non Friable material.
- F Friable material
- PF Potentially Friable material

APPENDIX VI HMIS All Data Report



ALL DATA REPORT



			Elementary					Building	g Name: Ho	oly Name o	f Jesus					
Location: # Materials	#0 : Presume	d Asbestos-Containing Floor	: 0					Room #	:				Area (sqft): 0			
Survey Da	te:							Last Re	-Assessme	ent: 2023-0	7-17					
							AS	BESTOS								
System	Component	Material	Item	Covering	A*	۷*	AP*	Good	Fair	Poor	Unit	Sample	Asbestos Type	Amount	Hazard	Friable
Other		 N/A, Roofing tars and mastics, Ceramic tile setting compound, Elevator and lift brakes, Electrical components, Mechanical packing, ropes, and gaskets, Vermiculite, Adhesives and duct mastics, Caulking and putties, Sealants on pipe threads 			D	Ν		100(7)			%	V9500	Presumed Asbestos		Presumed Asbestos	NF
Where pres	ent, these ma	aterials are assumed to contain asbes	tos until otherwis	se proven by	samp	ing ar	nd anal	ysis.								

Location:	milton-Wentwo #1001 : Entire ate: 2023-07-17	Building Floo	: Elementary pr:					Room # Last Re	g Name: He t: e-Assessme	-			Area (sqft): 0			
								BESTOS								
System	Component	Material	Item	Covering	A*	V*	AP*	Good	Fair	Poor	Unit	Sample	Asbestos Type	Amount	Hazard	Friable
Ceiling		Ceiling Tiles (lay-in)			С	Y						V0000	Non-Asbestos		None	
Ceiling		Drywall and joint compound			С	Y						V0000	Non-Asbestos		None	
Duct		Not Insulated			С	Ν						V0000	Non-Asbestos		None	
Floor		Vinyl Floor Tile and Mastic			Α	Y						V0000	Non-Asbestos		None	
Floor ¹		Vinyl Sheet Flooring			Α	Y						V0000	Non-Asbestos		None	
Floor		Ceramic Tiles			Α	Y						V0000	Non-Asbestos		None	
Other		None Found										V0000	Non-Asbestos		None	
Piping	All	Not Insulated			С	Y						V0000	Non-Asbestos		None	
Wall		Drywall and joint compound			Α	Y						V0000	Non-Asbestos		None	
Wall		Masonry			Α							V0000	Non-Asbestos		None	

1 - Faux wood



ALL DATA REPORT



legend.

LUG	21141							
Sample n	umber	Units			Other			
S####	Asbestos sample collected	SF	Square feet			Α	Access	
V####	Material visually similar to numbered sample collected	LF	Linear feet			v	Visible	
V0000	Known non-asbestos material	EA	Each			AP	Air Plenum	
V9000	Visually identified as an asbestos material	%	Percentage			F	Friable material	
V9500	Material is presumed to be an asbestos material					NF	Non Friable material	
						PF	Potentially Friable material	
Access				Condition				

Good

Fair

Poor

- А Accessible to all building occupants
- в Accessible to maintenance and operations staff without a ladder
- Accessible to maintenance and operations staff with a ladder. Also rarely entered, С locked areas
- D Not normally accessible

Visible

- The material is visible when standing on the floor of the room, without the removal or Υ opening of other building components (e.g. ceiling tiles or access panels).
 - The material is not visible to view when standing on the floor of the room and requires
- the removal of a building component (e.g. ceilings tiles or access panels) to view and Ν access. Includes rarely entered crawlspaces, attic spaces, etc. Observations will be limited to the extent visible from the access points.

Colour Coding

The material is known to contain regulated concentrations of asbestos; either by analytical results or visible identification (use of the V9000 code). The material is presumed to contain asbestos; based on visual appearances; typically a material known to historically contain asbestos; however, not sampled due to limited access or the destructive nature of the sampling.

Action

- (1) Clean up of ACM Debris Precautions for Work Which may Disturb ACM in (4) Poor Condition
- Management program and surveillance (7)

Yes or No field is only completed where Air Plenum consideration is required by regulation.

Minor, repairable damage, cracking, delamination or deterioration

Irreparable damage or deterioration with exposed and missing material

Air Plenum The material is in a return air plenum or in a direct airstream or there is evidence of air erosion (e.g. duct for heating or cooling blowing directly on or across an ACM). This

Precautions for Access Which may Disturb ACM ACM removal

No visible damage or deterioration

- (2) (3) Debris Proactive ACM removal (Minimum repair required for (5) (6) fair condition)

 - ACM repair